

# **EXHIBIT 4**



US008337513B2

(12) **United States Patent**  
**Shadduck**

(10) **Patent No.:** **US 8,337,513 B2**  
(45) **Date of Patent:** **\*Dec. 25, 2012**

(54) **INSTRUMENTS AND TECHNIQUES FOR  
CONTROLLED REMOVAL OF EPIDERMAL  
LAYERS**

2,867,214 A 1/1959 Wilson  
2,881,763 A 4/1959 Robbins  
(Continued)

(75) Inventor: **John H. Shadduck**, Tiburon, CA (US)

**FOREIGN PATENT DOCUMENTS**

(73) Assignee: **Axia MedSciences, LLC**, Tiburon, CA (US)

EP 0258901 9/1987  
EP 0564392 3/1993

(\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1268 days.

This patent is subject to a terminal disclaimer.

**OTHER PUBLICATIONS**

Ex Parte Reexamination Certificate US 6,241,739 Cl,  
Microdermabrasion Device and Method of Treating the Skin Surface,  
Inventor Stephen H. Waldron, Dec. 11, 2007, and file history through  
Aug. 8, 2006.

(21) Appl. No.: **11/739,615**

(22) Filed: **Apr. 24, 2007**

*Primary Examiner* — Vy Q Bui

(74) *Attorney, Agent, or Firm* — Knobbe, Martens, Olson &  
Bear, LLP

(65) **Prior Publication Data**

US 2007/0208353 A1 Sep. 6, 2007

**Related U.S. Application Data**

(60) Division of application No. 10/699,747, filed on Nov. 3, 2003, now Pat. No. 7,789,886, which is a continuation of application No. 09/648,025, filed on Aug. 25, 2000, now Pat. No. 6,641,591.

(60) Provisional application No. 60/150,782, filed on Aug. 26, 1999.

(51) **Int. Cl.**

**A61B 17/50** (2006.01)  
**A61B 17/06** (2006.01)

(52) **U.S. Cl.** ..... **606/131; 604/289**

(58) **Field of Classification Search** ..... **606/131,**  
**606/132, 133; 604/289**

See application file for complete search history.

(56) **References Cited**


**U.S. PATENT DOCUMENTS**

2,608,032 A 8/1952 Garver  
2,701,559 A 2/1955 Cooper  
2,712,823 A 7/1955 Kurtin

(57) **ABSTRACT**

An instrument and technique for the removal of epidermal layers in a controlled manner utilizing a hand-held instrument with a working end that (i) a vacuum aspiration system, (ii) a source for delivery of a sterile fluids or pharmacological agents to the skin; and (iii) a skin interface surface in the working end that has specially shape structure for abrading surface layers of the patient's epidermis as the working end is moved over the patient's skin while at the same time causing rapid penetration of the fluids into the skin for therapeutic purposes. Movement of the working end across the skin causes abrasion of the surface layers in a path over the patient's skin. The method of the invention may be used in a periodic treatment for the removal of superficial skin layers that enhances the synthesis of dermal collagen aggregates by inducing the body's natural wound healing response. The method of the invention creates more normal dermal architectures in skin with limited depths of skin removal by the series of superficial treatments that may be comparable to the extent of neocollagenesis caused by a deep skin removal treatment (e.g., CO<sub>2</sub> laser skin removal).

**14 Claims, 9 Drawing Sheets**

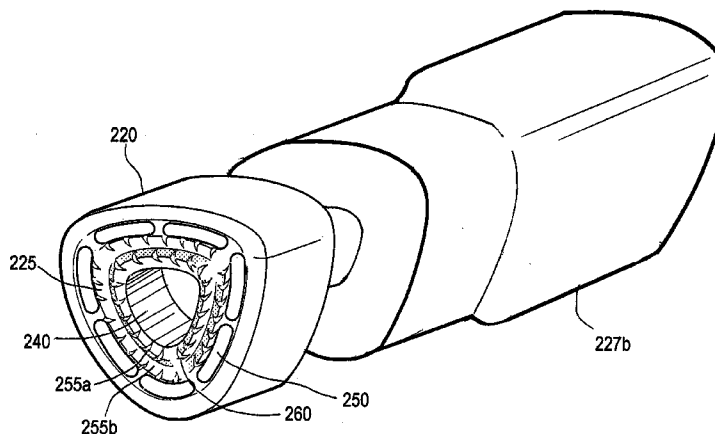

## US 8,337,513 B2

Page 2

U.S. PATENT DOCUMENTS			
2,921,585 A	1/1960	Schumann	5,873,881 A 2/1999 McEwen et al.
3,085,573 A	4/1963	Meyer et al.	5,882,201 A 3/1999 Salem
3,214,869 A	11/1965	Stryker	5,971,999 A 10/1999 Naldoni
3,476,112 A	11/1969	Elstein	6,019,749 A 2/2000 Fields et al.
3,574,239 A	4/1971	Sollerud	6,024,733 A 2/2000 Eggers et al.
3,715,838 A	2/1973	Young et al.	6,039,745 A 3/2000 Di Fiore et al.
3,964,212 A	6/1976	Karden	6,042,552 A 3/2000 Cornier
4,121,388 A	10/1978	Wilson	6,080,165 A * 6/2000 DeJacma ..... 606/131
4,155,721 A	5/1979	Fletcher	6,080,166 A 6/2000 McEwen et al.
4,182,329 A	1/1980	Smith et al.	6,090,085 A 7/2000 Mehl, Sr. et al.
4,203,431 A	5/1980	Abura et al.	6,136,008 A 10/2000 Becker et al.
4,216,233 A	8/1980	Stein	6,139,553 A 10/2000 Dotan
4,378,804 A	4/1983	Cortese	6,139,554 A 10/2000 Karkar et al.
4,560,373 A	12/1985	Sugino et al.	6,149,634 A 11/2000 Bernabei
4,646,480 A	3/1987	Williams	6,162,232 A 12/2000 Shaddock
4,646,482 A	3/1987	Chitjian	6,183,483 B1 2/2001 Chang
4,676,749 A	6/1987	Mabille	6,238,275 B1 5/2001 Metcalf et al.
4,706,676 A	11/1987	Peck	6,241,739 B1 6/2001 Waldron
4,754,756 A	7/1988	Shelanski	6,283,978 B1 9/2001 Cheski et al.
4,757,814 A	7/1988	Wang et al.	6,299,620 B1 10/2001 Shaddock et al.
4,900,316 A	2/1990	Yamamoto	6,306,119 B1 10/2001 Weber et al.
4,917,086 A	4/1990	Feltovich et al.	6,387,103 B2 5/2002 Shaddock
4,957,747 A	9/1990	Stiefel	6,423,078 B1 * 7/2002 Bays et al. .... 606/131
5,012,797 A	5/1991	Liang et al.	6,471,712 B2 10/2002 Burres
5,035,089 A	7/1991	Tillman et al.	6,500,183 B1 12/2002 Waldron
5,037,431 A	8/1991	Summers et al.	6,629,983 B1 10/2003 Ignon
5,037,432 A	8/1991	Molinari	6,641,591 B1 11/2003 Shaddock
5,100,412 A	3/1992	Rosso	6,685,853 B1 2/2004 Angelopoulos et al.
5,122,153 A	6/1992	Harrel	6,695,853 B2 2/2004 Karasiuk
5,207,234 A	5/1993	Rosso	6,869,611 B1 3/2005 Kligman et al.
5,612,797 A	3/1997	Clarke	7,087,063 B2 8/2006 Carson et al.
5,674,235 A	10/1997	Parisi	7,678,120 B2 3/2010 Shaddock
5,759,185 A *	6/1998	Grinberg ..... 606/80	7,789,886 B2 9/2010 Shaddock
5,800,446 A	9/1998	Banuchi	2002/0107527 A1 8/2002 Burres
5,810,842 A	9/1998	Di Fiore et al.	2003/0212415 A1 11/2003 Karasiuk
			2006/0200172 A1 9/2006 Shaddock
			2006/0200173 A1 9/2006 Shaddock


\* cited by examiner

U.S. Patent


Dec. 25, 2012

Sheet 1 of 9

US 8,337,513 B2

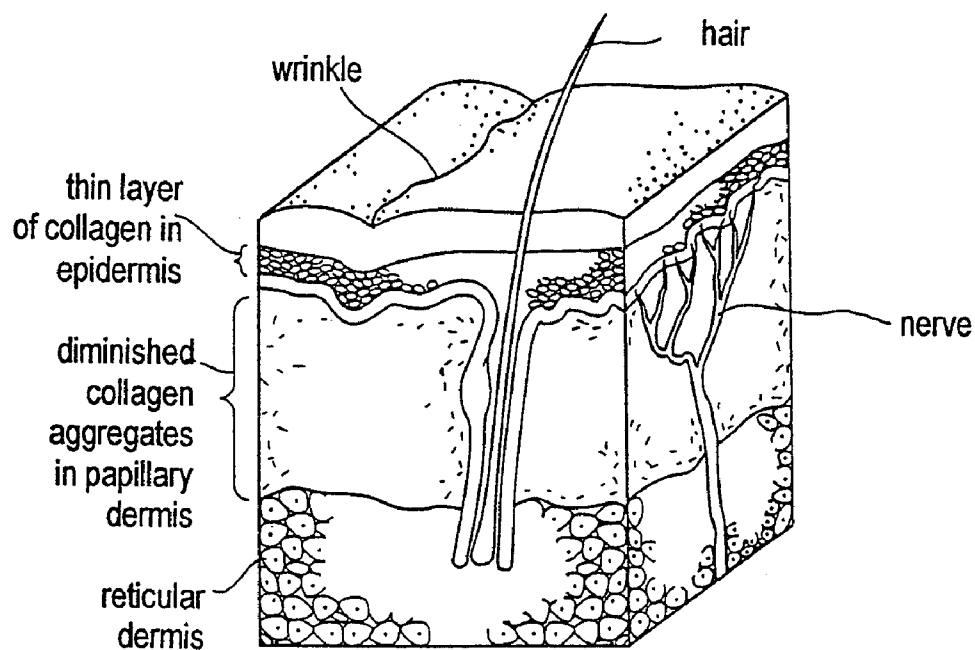

**FIG. 1A**

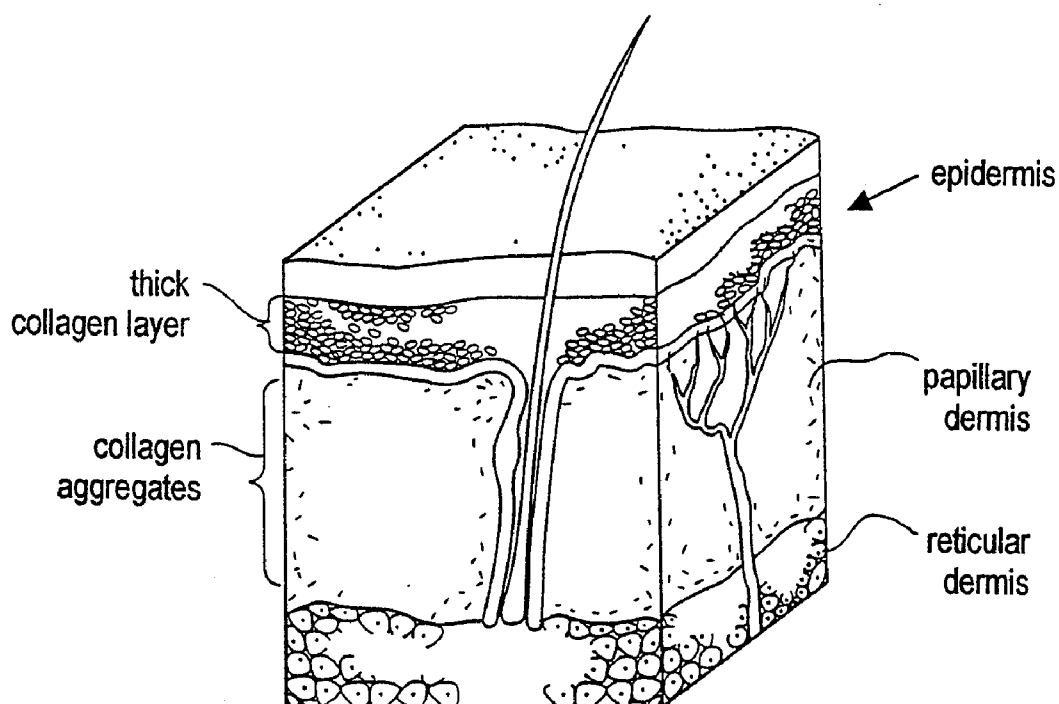

**FIG. 1B**



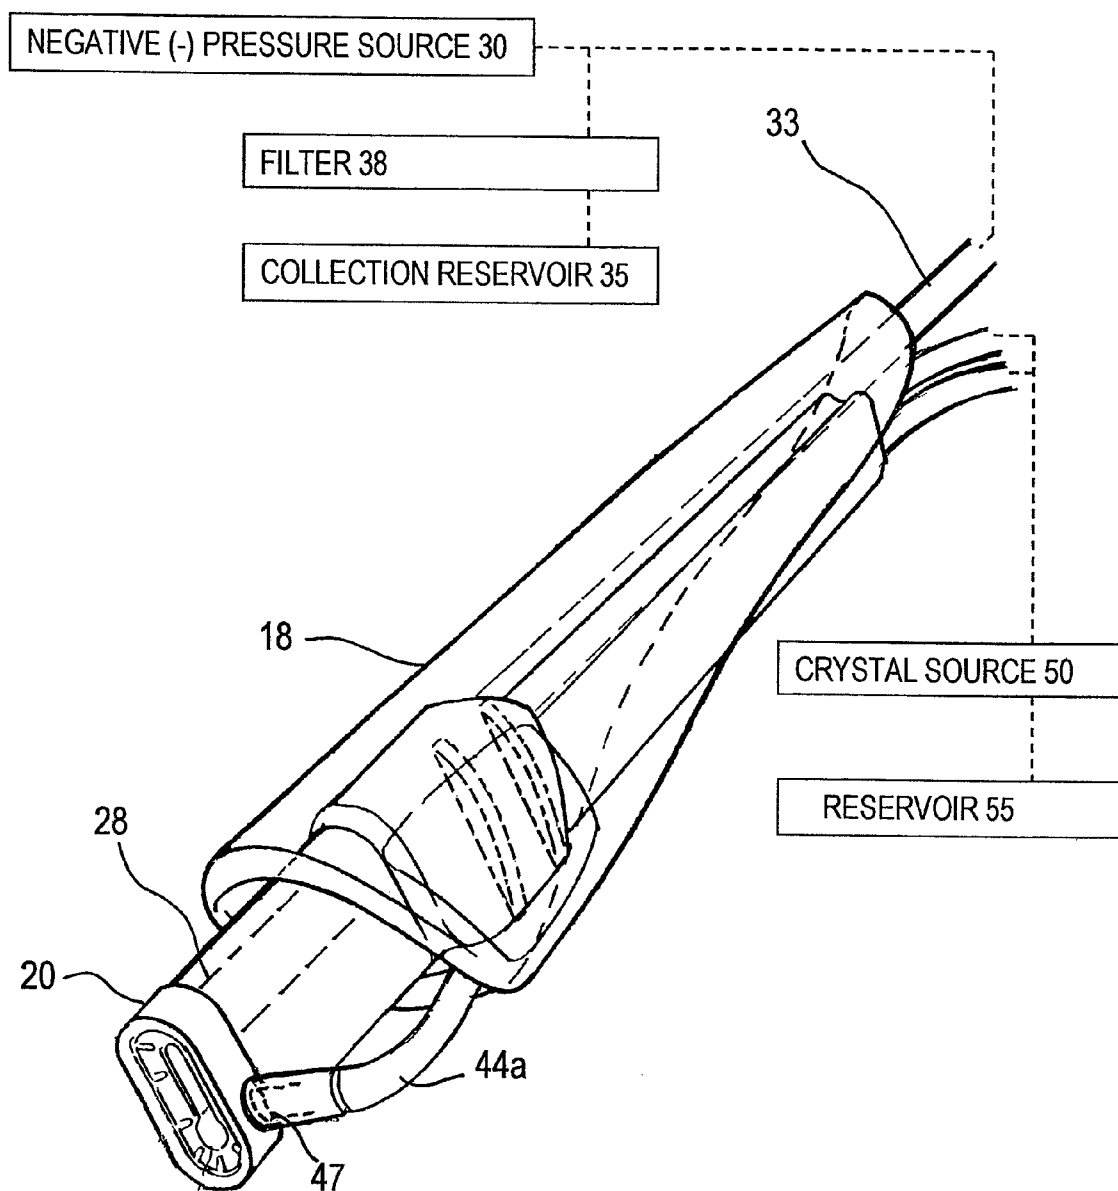


FIG. 2

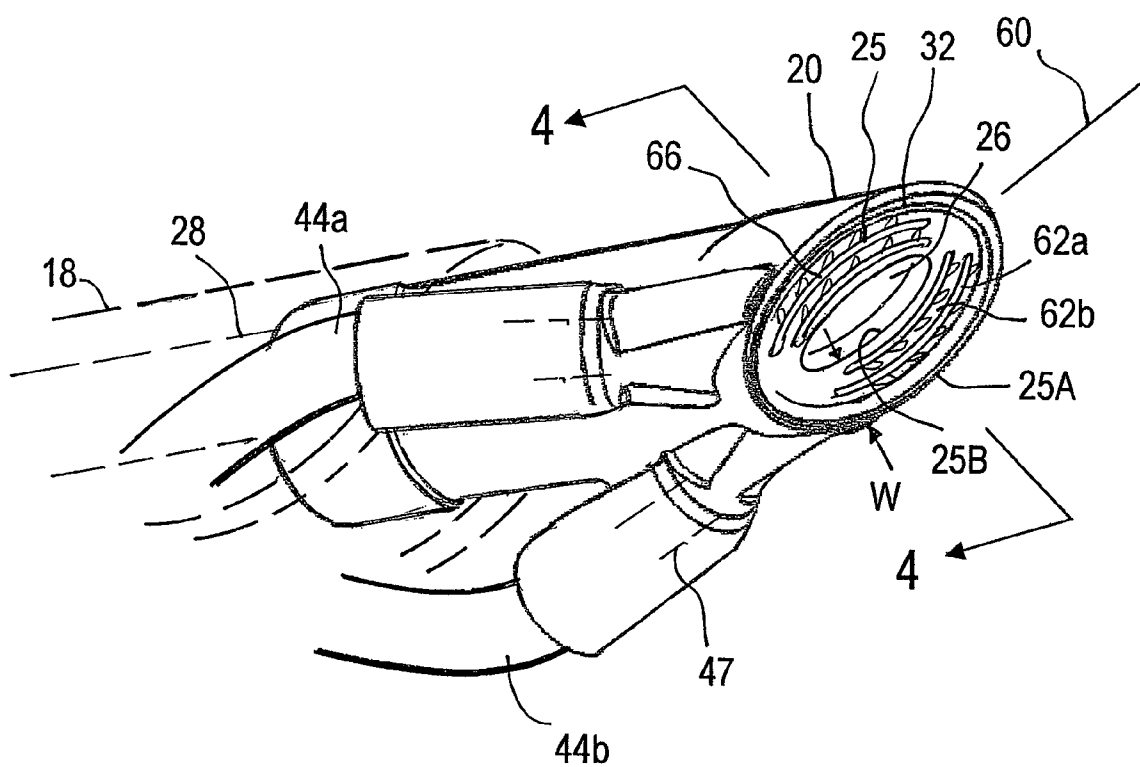

*FIG. 3*

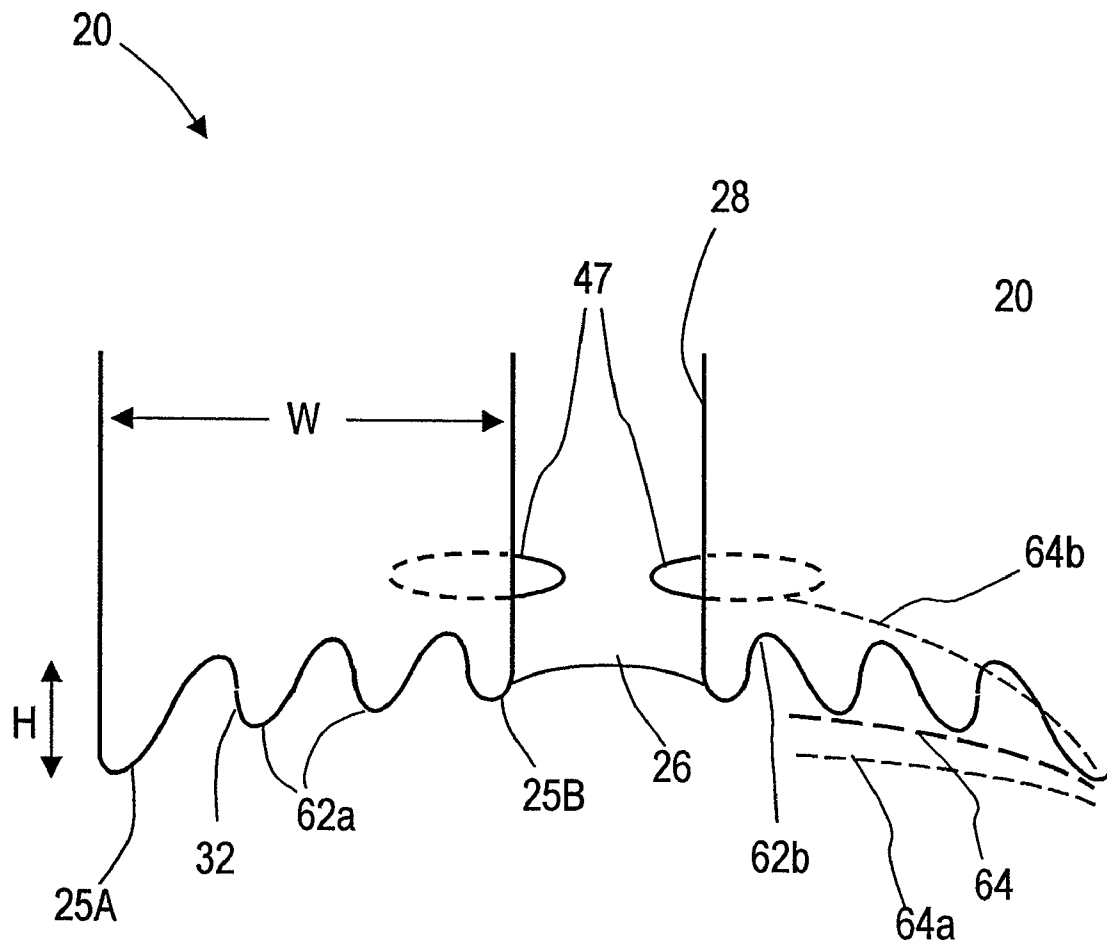


*FIG. 4*

U.S. Patent

Dec. 25, 2012

Sheet 5 of 9

US 8,337,513 B2

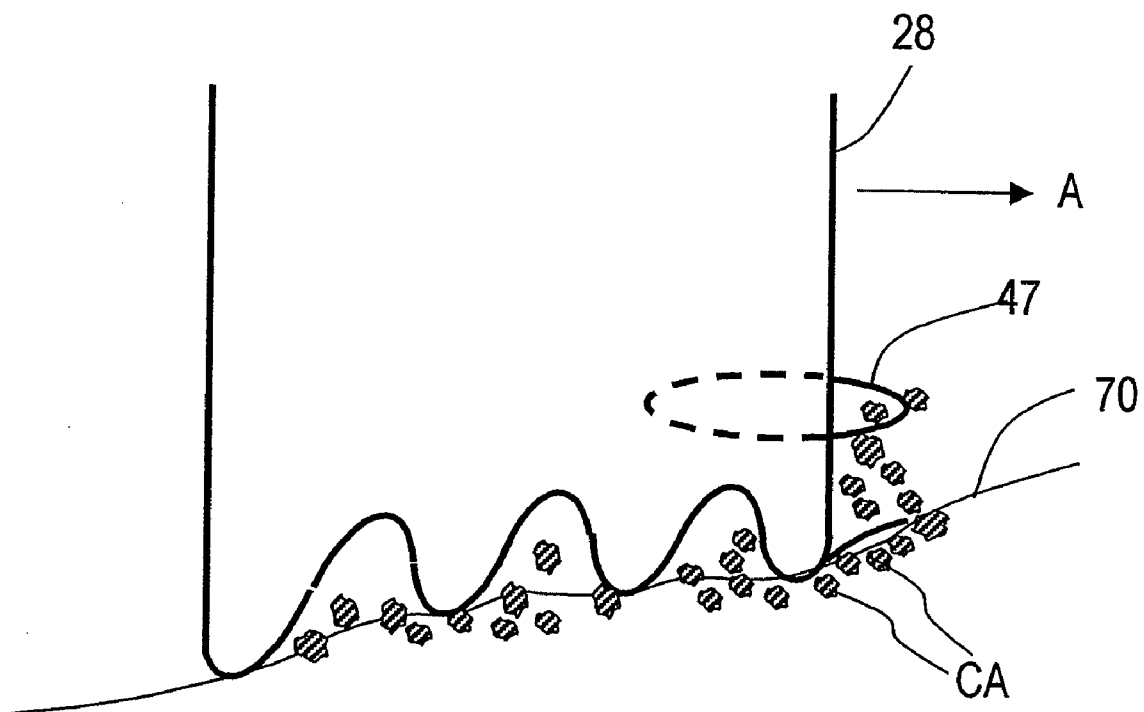

*FIG. 5*




U.S. Patent

Dec. 25, 2012

Sheet 6 of 9

US 8,337,513 B2

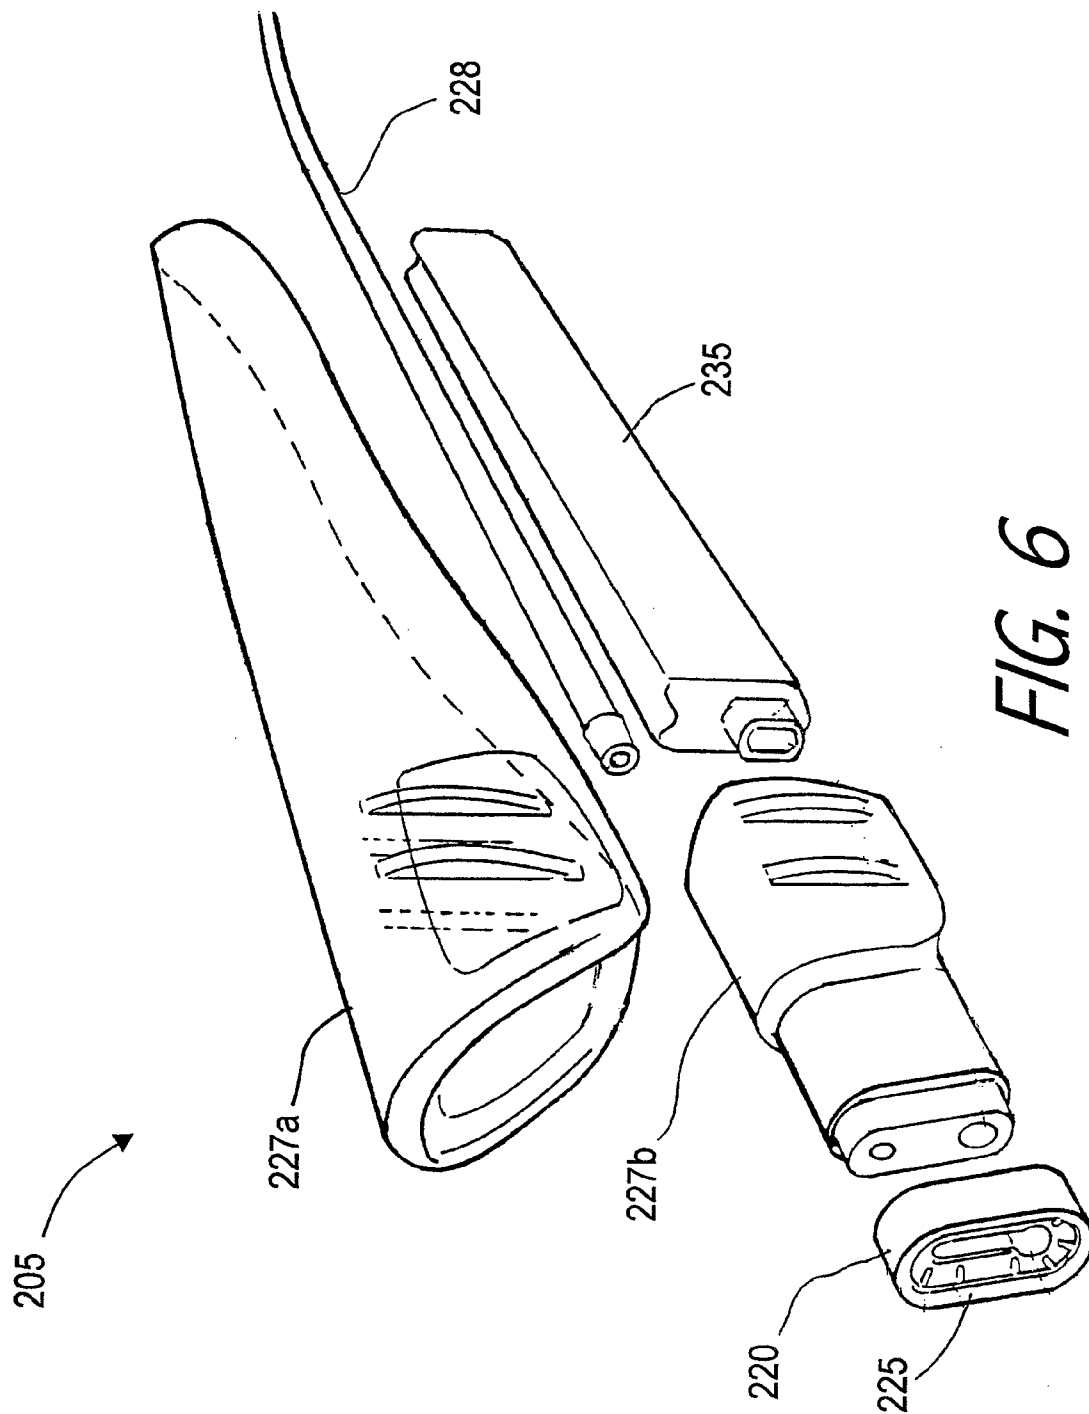


U.S. Patent

Dec. 25, 2012

Sheet 7 of 9

US 8,337,513 B2

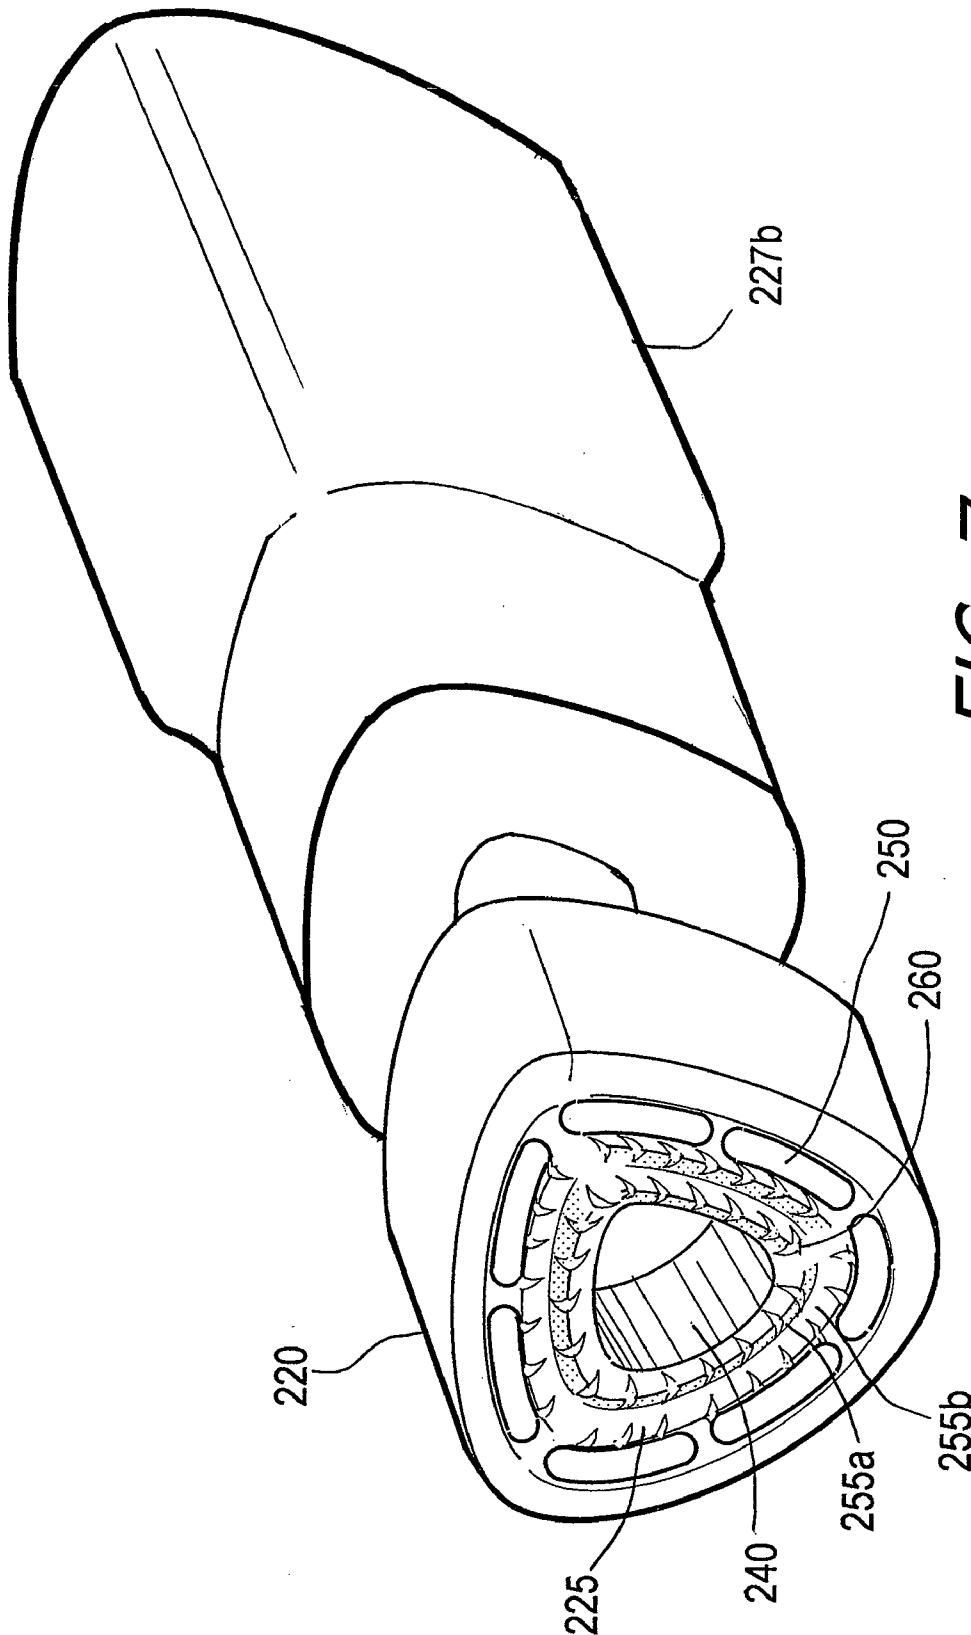


U.S. Patent


Dec. 25, 2012

Sheet 8 of 9

US 8,337,513 B2

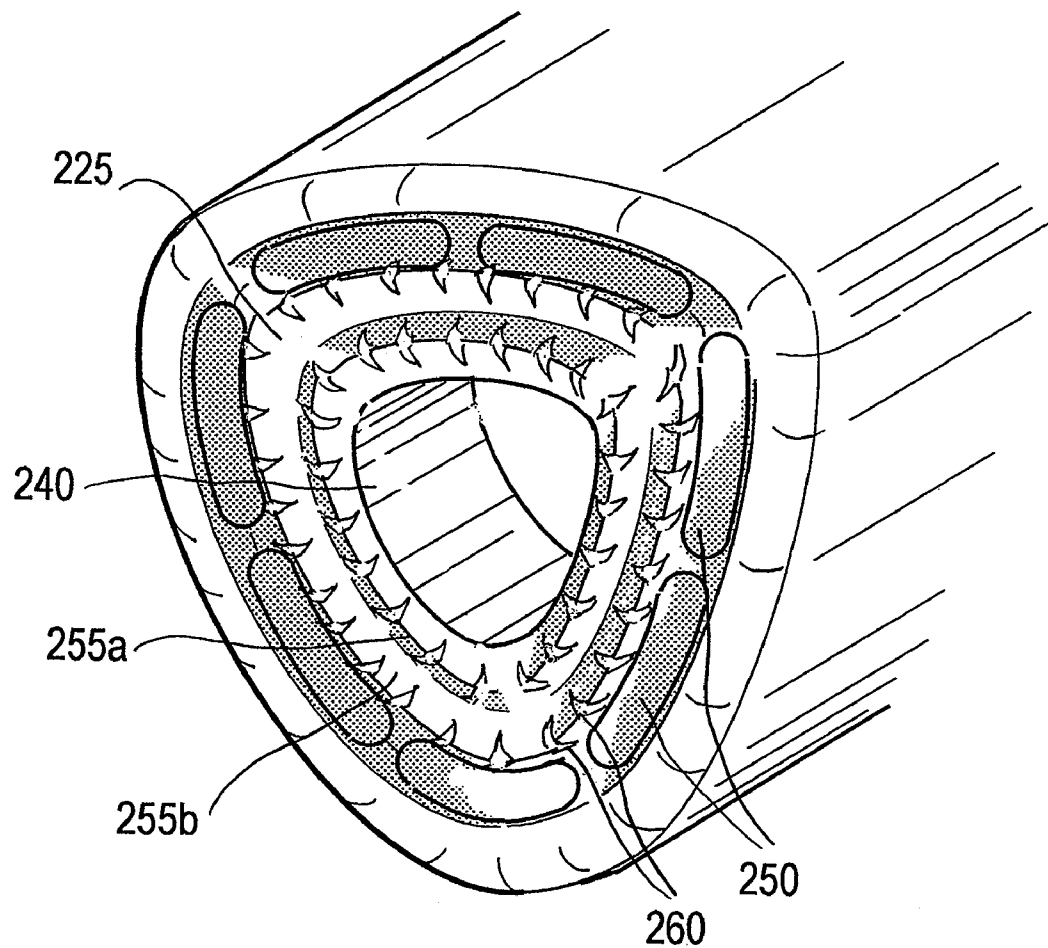

*FIG. 8*

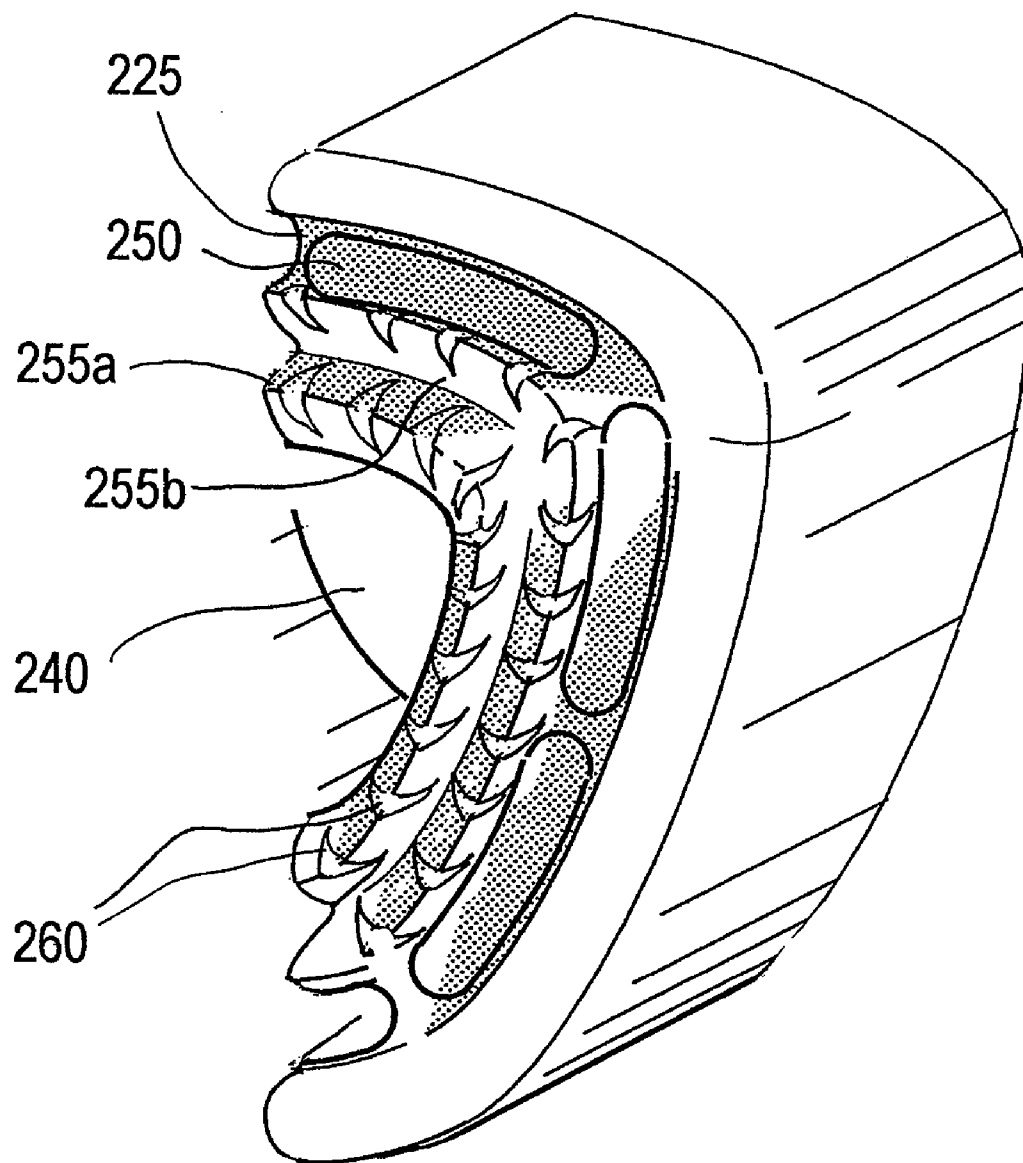

*FIG. 9*

US 8,337,513 B2

# 1

## INSTRUMENTS AND TECHNIQUES FOR CONTROLLED REMOVAL OF EPIDERMAL LAYERS

### PRIORITY INFORMATION

This application is a divisional of U.S. patent application Ser. No. 10/699,747, filed Nov. 3, 2003, which is a continuation of U.S. patent application Ser. No. 09/648,025 filed Aug. 25, 2000, now U.S. Pat. No. 6,641,591, which claims the priority benefit under 35 U.S.C. §119(e) of Provisional U.S. Patent Application Ser. No. 60/150,782, filed Aug. 26, 1999, the entire contents of these applications being hereby incorporated by reference herein.

### BACKGROUND OF THE INVENTION

#### 1. Field of the Invention

The present invention relates to devices for dermatology and more particularly to a hand-held instrument with a working end that carries (i) a negative pressure aspiration system, (ii) a source for delivery of a sterile fluids to the skin; and (iii) a skin interface surface in the working end that has specially shape structure for abrading surface layers of the patient's epidermis as the working end is moved over the patient's skin while at the same time causing rapid penetration of the fluids into the skin for therapeutic purposes.

#### 2. Description of the Related Art

Dermatologists and plastic surgeons have used various methods for removing superficial skin layers to cause the growth of new skin layers (i.e., commonly described as skin resurfacing techniques) since the early 1900's. Early skin resurfacing treatments used an acid such as phenol to etch away surface layers of a patient's skin that contained damage to thereafter be replaced by new skin. (The term damage when referring to a skin disorder is herein defined as any cutaneous defect, e.g., including but not limited to rhytides, hyperpigmentation, acne scars, solar elastosis, other dyschromias, stria distensae, seborrheic dermatitis).

Following the removal of surface skin layers at a particular depth, no matter the method of skin removal, the body's natural wound-healing response begins to regenerate the epidermis and underlying wounded skin layers. The new skin layer will then cytologically and architecturally resemble a younger and more normal skin. The range of resurfacing treatments can be divided generally into three categories based on the depth of the skin removal and wound: (i) superficial exfoliations or peels extending into the epidermis, (ii) medium-depth resurfacing treatments extending into the papillary dermis, and (iii) deep resurfacing treatments that remove tissue to the depth of the reticular dermis (see FIGS. 1A-1B).

Modern techniques for skin layer removal include: CO.sub.2 laser resurfacing which falls into the category of a deep resurfacing treatment; Erbium laser resurfacing which generally is considered a medium-depth treatment; mechanical dermabrasion using high-speed abrasive wheels which results in a medium-depth or deep resurfacing treatment; and chemical peels which may range from a superficial to a deep resurfacing treatment, depending on the treatment parameters. A recent treatment, generally called micro-dermabrasion, has been developed that uses an air-pressure source to deliver abrasive particles directly against a patient's skin at high-velocities to abrade away skin layers. Such a micro-dermabrasion modality may be likened to sandblasting albeit at velocities that do not cause excess pain and discomfort to the

2

patient. Micro-dermabrasion as currently practiced falls into the category of a superficial resurfacing treatment.

A superficial exfoliation, peel or abrasion removes some or all of the epidermis (see FIGS. 1A-1B) and thus is suited for treating very light rhytides. Such a superficial exfoliation is not effective in treating many forms of damage to skin. A medium-depth resurfacing treatment that extends into the papillary dermis (see FIG. 1B) can treat many types of damage to skin. Deep resurfacing treatments, such as CO.sub.2 laser treatments, that extend well into the reticular dermis (see FIG. 1B) causes the most significant growth of new skin layers but carry the risk of scarring unless carefully controlled.

It is useful to briefly explain the body's mechanism of actually resurfacing skin in response to the removal of a significant depth of dermal layers. Each of the above-listed depths of treatment disrupts the epidermal barrier, or a deeper dermal barrier (papillary or reticular), which initiates varied levels of the body's wound-healing response. A superficial skin layer removal typically causes a limited wound-healing response, including a transient inflammatory response and limited collagen synthesis within the dermis. In a medium-depth or a deep treatment, the initial inflammatory stage leads to hemostasis through an activated coagulation cascade. Chemotactic factors and fibrin lysis products cause neutrophils and monocytes to appear at the site of the wound. The neutrophils sterilize the wound site and the monocytes convert to macrophages and elaborate growth factors which initiate the next phase of the body's wound-healing response involving granular tissue formation. In this phase, fibroblasts generate a new extracellular matrix, particularly in the papillary and reticular dermis, which is sustained by angiogenesis and protected anteriorly by the reforming epithelial layer. The new extracellular matrix is largely composed of collagen fibers (particularly Types I and III) which are laid down in compact parallel arrays (see FIG. 1B). It is largely the collagen fibers that provide the structural integrity of the new skin—and contribute to the appearance of youthful skin.

All of the prevalent types of skin damage (rhytides, solar elastosis effects, hyperpigmentation, acne scars, dyschromias, melasma, stria distensae) manifest common histologic and ultrastructural characteristics, which in particular include disorganized and thinner collagen aggregates, abnormalities in elastic fibers, and abnormal fibroblasts, melanocytes and keratinocytes that disrupt the normal architecture of the dermal layers. It is well recognized that there will be a clinical improvement in the condition and appearance of a patient's skin when a more normal architecture is regenerated by the body's wound-healing response. Of most significance to a clinical improvement is skin is the creation of more dense parallel collagen aggregates with decreased periodicity (spacing between fibrils). The body's wound-healing response is responsible for synthesis of these collagen aggregates. In addition to the body's natural wound healing response, adjunct pharmaceutical treatments that are administered concurrent with, or following, a skin exfoliations can enhance the development of collagen aggregates to provide a more normal dermal architecture in the skin—the result being a more youthful appearing skin.

The deeper skin resurfacing treatments, such as laser ablation, chemical peels and mechanical dermabrasion have drawbacks. The treatments are best used for treatments of a patient's face and may not be suited for treating other portions of a patient's body. For example, laser resurfacing of a patient's neck or décolletage may result in post-treatment pigmentation disorders. All the deep resurfacing treatments are expensive, require anesthetics, and must be performed in

## US 8,337,513 B2

3

a clinical setting. Perhaps, the most significant disadvantage to deep resurfacing treatments relates to the post-treatment recovery period. It may require up to several weeks or even months to fully recover and to allow the skin the form a new epidermal layer. During a period ranging from a few weeks to several weeks after a deep resurfacing treatment, the patient typically must wear heavy make-up to cover redness thus making the treatment acceptable only to women.

The superficial treatment offered by micro-dermabrasion has the advantages of being performed without anesthetics and requiring no extended post-treatment recovery period. However, micro-dermabrasion as currently practices also has several disadvantages. First, a micro-dermabrasion treatment is adapted only for a superficial exfoliation of a patient's epidermis which does not treat many forms of damage to skin. Further, the current micro-dermabrasion devices cause abrasive effects in a focused area of the skin that is very small, for example a few mm.<sup>sup.2</sup>, since all current devices use a single pin-hole orifice that jets air and abrasives to strike the skin in a highly focused area. Such a focused treatment area is suitable for superficial exfoliations when the working end of the device is passed over the skin in overlapping paths. Further, such focused energy delivery is not well suited for deeper skin removal where repeated passes may be necessary. Still further, current micro-dermabrasion devices are not suited for deeper skin removal due to the pain associated with deep abrasions. Other disadvantages of the current micro-dermabrasion devices relate to the aluminum oxide abrasive particles that are typically used. Aluminum oxide can contaminate the working environment and create a health hazard for operators and patients alike. Inhalation of aluminum oxide particles over time can result in serious respiratory disorders.

## BRIEF DESCRIPTION OF THE DRAWINGS

FIGS. 1A-1B are sectional illustrations of a patient's skin showing dermal layers.

FIG. 2 is a view of a Type "A" body and working end of the instrument of the invention.

FIG. 3 is an enlarged view of the working end of the instrument of FIG. 2.

FIG. 4 is a sectional view of working end of FIG. 3.

FIG. 5 is a view showing the manner of using the working end of the invention of FIGS. 3-4 in performing a method of the invention.

FIG. 6 is a view of a Type "B" body, working end and handle in an exploded view.

FIG. 7 is a view of the working end of the instrument of FIG. 6 and a housing.

FIG. 8 is an enlarged view of the skin interface of the working end of FIG. 7.

FIG. 9 is a sectional view of the skin interface of FIG. 8.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

1. Type "A" Skin Resurfacing System. Referring to FIGS. 2-3, an exemplary instrument system 5 is shown for removing superficial skin layers. The instrument system 5 includes: (i) a hand-held body 18 with a working end 20 that defines a skin interface surface portion indicated at 25 in FIGS. 2-3. An opening portion 26 transitions into an interior passageway 28 that extends through the body to communicate with a negative (-) pressure source (or aspiration source) indicated at 30 that operates as vacuum means for aspirating skin debris from a targeted skin surface treatment site TS.

4

Of particular interest, FIGS. 3-4 show views of the working end 20 with the skin interface 25 being configured with a particular irregular or ridged surface structure indicated at 32. The ridged surface structure 32 further has a particular minimum width dimension W to accommodate from the ridge shape with as many as about 25 ridges on each side of opening 26 depending on the overall dimensions of the working end 20. More particular aspects of the irregular or ridged surface structure 32 will be described below.

In this preferred embodiment, the working end 20 is of any suitable material, such as a transparent medical grade plastic. The transparency of the working end will assist the operator in localizing treatment in a particular targeted skin treatment area. The overall transverse dimension of the working end 20 of FIGS. 2-3 may be from around about 5.0 mm. to about 50.0 mm. with a larger dimensioned end being adapted for treating a larger skin area (e.g., arms, back legs and décolletage). A typical dimension is from about 5.0 mm. to 15.0 mm. for a skin treatment site area TS around a patient's face.

The invention allows the area (e.g., in mm<sup>2</sup>) of opening 26 be in any selected shape but preferably is an elongate shape in the center of the working end 25. The open distal end 26 comprises the distal termination of passageway 28 and the proximal end of the passageway in handle 18 is connected to a flexible aspiration tube 33 that extends to a remote collection reservoir 35 intermediate to the actual aspiration source 30. The aspiration source 30 thus is adapted to draw the working end 20 and more particularly the skin interface 25 against the skin treatment site TS to perform the method of the invention as will be described below. The aspiration source or negative (-) pressurization source 30 may be any suitable vacuum source known in the art. Between the aspiration source 30 and remote collection reservoir 35 may be a filter 38 subsystem that is known in the art for collecting aspirated skin detritus and spent crystalline agents CA that are captured in the open distal end of passageway chamber 28. The collection reservoir 35 and filter 38 are preferably of inexpensive plastic and other materials that are disposable.

The aspiration source 30 may be provided with an adjustable valve means 40 for adjusting the pressure level setting to any suitable range. The physician will learn from experience how to balance the pressure level to attain the desired level of suction against the patient's skin. A trigger or switch component 42 is provided as a foot-switch (FIG. 2) but any suitable finger switch in the body 18 also may be used.

The working end 20 also carries means for introducing abrasive crystals into the working end or distalmost end of passageway 28 to allow individual loose crystalline agents CA to thereafter be captured between the skin interface 25 and the patient's skin. In this embodiment, two channels 44a-44b are provided together with flexible tubes 46a-46b to introduce the loose crystalline agents CA into the working end (see FIGS. 2-4). Each distal portion 47 (collectively) of the channels 44a-44b may comprise a small dimension aperture to limit the rate of flow of crystalline agents CA into the working end. The number of such channels (i.e., 44a-44n) may range from one to about ten and fall within the scope of the invention. Any singular or plural number of channels can serve the purpose of slowly introducing crystal into the working end. Referring to FIGS. 2-3, the crystalline agent CA delivery source 50 comprises a reservoir 55 that holds a suitable volume of abrasive crystals for a single treatment or a number of treatments. A flexible supply tube 56 extends between a remote the reservoir 55, and in this embodiment the tube is split to connect to the two channels 44a-44b. Preferably, the remote reservoir 55 that carries the crystalline agent CA is unpressurized but carries air intake relief valve 58 such



## US 8,337,513 B2

5

that any slight negative pressure created by the aspiration source **30** when the skin interface is in contact with a patient's skin will draw crystals to the working end. It should be appreciated that reservoir **55** may be built into handle body **18** and fall within the scope of the invention. The crystal delivery source **50** may carry crystals ranging in size from about 1  $\mu$ m to about 50  $\mu$ m in maximum cross-sectional dimension, (for example, aluminum oxide crystals). Preferably, the crystals are from about 5  $\mu$ m to about 30  $\mu$ m in maximum cross-sectional dimension to allow a very fine abrasion of the epidermis.

It has been found that by a slight negative pressure environment the open end **26** and passageway **28**, the crystalline agent will be caused to dribble into, or be sucked into, the passageway **28** in the working end **20**. Thereafter, the movement of the working end **20** in a sideways movement over the skin causes a portion of the crystalline agent CA volume to be captured temporarily in the irregular or corrugated surface structure of the skin interface **25**. In this process of moving the skin interface **25** over the targeted treatment site TS, it has been found that the sharp-edged crystalline agents are rolled over and over while being pressed into the surface of the skin and thereby abrade and remove the skin surface in a controllably gentle manner that is below any threshold of significant pain.

After the spent crystals are rolled over and over by the skin interface when moving in a first lateral direction across the skin, and after the working end is then reversed in directional movement across the skin, a portion of the spent crystals and abraded skin debris necessarily roll into the central opening portion **26** wherein the negative pressure environment captures and aspirates the abraded materials to the remote collection reservoir **35**.

To facilitate the process described above, the invention is provided with novel aspects that relate to the irregular or ridged surface structure **32** mentioned above. The entire skin interface **25** may be of any suitable plan form (e.g., round, oval, rectangular etc.) and fall within the scope of the invention. More in particular, the interface **25** defines a 1<sup>st</sup> outer periphery **25A** and a 2<sup>nd</sup> inner periphery **25B** that generally are in apposition to one another and are spaced apart by width W with the inner periphery about the edge of opening **26** (see FIG. 3).

In a preferred embodiment shown in FIGS. 3-4, the concept of 1<sup>st</sup> and 2<sup>nd</sup> peripheries **25A** and **25B** in apposition thus comprise peripheries that are dual and side-by-side as shown in FIG. 4 and are thus adapted for side-to-side lateral or sideways movement while performing the technique of the invention, for example which is a natural movement of a human hand over a patient's skin. Thus, the direction of the ridges **60** extend generally transverse relative to a line drawn that indicates the direction of movement of the working end **20** in performing the method of the invention. That is, in the exemplary working end of FIG. 4, the working end is generally optimized for side-to-side or lateral movement. Thus, the ridge alignment is generally transverse to the direction of movement in operations indicated by arrow A. (In a circular working end that is adapted generally for movement in any direction, the direction of the ridges **60** may be generally transverse to any direction of movement by being concentric relative to a central opening **26** (not shown)).

The terms irregular or ridged shape structure **32** as used herein mean that a series of at least one projecting edge portion **62a** projects distally as a ridge within the skin interface portion **25**. The irregular shape structure **32** further typically carries recessed portions or valley portions **62b** that are recessed in the proximal direction intermediate to any plural-

6

ity of projecting edge portions **62a**. These surface configurations for convenience are herein termed the primary shape structure (or ridge and valley elements). The width of the skin interface **25** containing shape structure **32** may be from about 2.0 mm. to 25.0 mm. or more and preferably is from about 3.0 mm. to 10.0 mm. The number of ridges preferably are from about 1 ridge to 25 ridges on each side of the opening **26**. The height H of any ridge from the apex of the projecting portion **62a** to the depth of the valley portion **62b** may be from about 0.25 mm. to about 5.0 mm. and is preferably from about 0.5 mm. to about 2.0 m. It has been found that various ridge height dimensions are optimal depending on the patient's skin type. Further, but optionally, it has been found that secondary shape structure of notches or recessed grooves **66** configured across the primary shape structure of ridge and valley elements may help introduce loose crystals to regions of the skin interface **25** in contact with the skin which is desirable. Such secondary grooves **66** are shown in FIG. 4 and are preferably somewhat in alignment with an axis of channels **44a-44b** that introduce crystals into the working end **20** thus allowing the crystals to be suctioned into the valleys **62b** of the primary shape structure.

While the series of primary ridge and valley elements together the secondary grooves seems to be optimal for the method described below, it should be appreciated that the method also may be performed with a skin interface that has (i) only primary ridge and valley elements; (ii) or only a particular surface roughness that is appropriate for partially capturing loose crystals as will be described below-as long as the skin interface has a minimum width of about 3.0 mm. which was described as a preferred width dimension previously.

FIG. 4 further shows that at least some of the crests or apexes of some of the ridge portions **62a** together with the outermost periphery of the skin interface **25** define an overall tissue-receiving shape **64** that may range from flat to concave and is shown in a preferred concave configuration. The alternative shapes **64a-44b** are intended to indicate an approximate range of shapes that are suitable. The apexes of ridges **62a** need not all be at the same height to define shape **64**. The purpose of the concave shape is to cause the outer periphery of the working end to be in firm contact with the tissue surface while the negative pressure from aspiration source **30** draws the skin into firm contact with tissue interface **25**.

2. Practice of the Method of the Invention. Now turning to FIG. 5, a sectional view of working end **20** shows the technique of the present invention in exfoliating or removing skin surface layers. FIG. 5 shows the working end **20** after actuation of the negative (-) pressure source **30** with the skin surface **70** initially being drawn into the concave shape **64**. The operating negative pressures may be in any suitable range that is determined by investigation. It has been found by experimentation that optimal pressure levels vary greatly depending on (i) the type of skin targeted for treatment, (ii) the dimensions across the working end, and (iii) the dimensions of opening **26**.

Next, the operator moves the skin interface **25** across a treatment site TS which is a path on the patient's skin while still actuating moves the trigger **42** thereby maintaining the negative pressure environment in the passageway **26**. The negative pressure environment within the working end causes crystalline particles and entrained in air to be drawn into passageway **28** proximate to the skin surface and into the shape structure **32** of the skin interface **25**. The sideways or lateral movement of the skin interface **25** captures a portion of the crystals between the interface and the skin surface, in part by over-rolling them. The continued rolling of the sharp-

## US 8,337,513 B2

7

edged crystals trapped between the instrument and the skin surface **70** causes an abrasion and removal of the skin surface in a controllable manner.

As working end is moved in a reverse direction, the negative pressure environment in the passageway **28** captures and aspirates the spent crystals and skin debris to the remote collection reservoir **35**. At the end of a particular lateral movement of the working end, the operator may release the trigger **42** which terminates the crystal agent delivery and further allows the operator to easily lift the working end from the patient's skin. The treated path can be easily seen and the operator then can exfoliate another slightly overlapping or adjacent path by repeating the above steps until surface removal is completed over the targeted treatment area.

3. Type "B" Skin Resurfacing System. Referring to FIGS. **6-9**, another exemplary instrument system and treatment device **205** is shown for removing superficial skin layers. This system differs greatly from the Type "A" embodiment in the mechanism of action that abrades the skin since the Type "B" system uses a fluid media plus an abrading structure on the skin interface. Still several features of the Type "B" embodiment are similar to the Type "A" embodiment and the two modalities of treatment may be used to complement one another.

FIG. **6** shows that a hand-held instrument **208** has a removable working end **220** that defines a skin interface surface portion indicated at **225**. Handle portion **227a** mates with housing **227b**. A flexible tube **228** extends to a vacuum source **230**. A fluid reservoir **235** carrying a fluid skin treatment media is housed in the handle although it could also be a remote reservoir.

Referring now to FIGS. **7-9**, a first aperture arrangement consisting of at least one port or opening portion **240** of skin interface **225** that communicates with an interior passageway **242** that extends through housing **227b** to hose **228** and the vacuum or negative (-) pressure source.

FIGS. **7-9** further show a second aperture arrangement in the skin interface consisting of at least one port or openings **250** that extend around an outer periphery of the skin interface **225**. These opening(s) of the second aperture arrangement are in fluid communication with the reservoir **235** and the treatment media therein. The skin interface has a series of primary ridge elements **255a** and valley elements **255b** together the secondary notches or grooves **260** as defined above with similar dimensional parameters. This embodiment differs however in that the apexes of ridge elements **255a** are substantially a sharp edge as are the edges of the notches **260**. Thus, these primary surface elements **255a** and secondary surface elements thereby define teeth therebetween that seem well suited to abrading skin layers particularly after being hydrated by the fluid source of the system. Experimentation has shown that the vacuum source and fluid source may be reversed between the first and second aperture arrangements **240** and **250** with the method of skin removal still working well. The vacuum system aspirates away skin debris and spent fluids as described previously. Of particular interest, the method of the invention appears to work well because the suction on the skin treatment site very quickly hydrates, or puffs up, the skin which in turn makes the surface layer susceptible to painless abrasion. The ability of the system to rapidly deliver fluids to subsurface tissues allows the use of any pharmacological agent known in the art for enhancing skin rejuvenation as a part of the skin treatment. The system can use sterile water or saline solution for a treatment to remove dermal tissue with the abrasive surface of the treat-

8

ment device. The system can also use a fluid carrying a chemical agent of a suitable concentration be selected from a group of acids including TCA (trichloroacetic acid), a glycolic acid including an alphahydroxy acid (AHA), a lactic acid, a citric acid, or phenol as disclosed in co-pending U.S. patent application Ser. No. 09/524,731 filed Mar. 14, 2000 which is incorporated herein by this reference.

Specific features of the invention may be shown in some figures and not in others, and this is for convenience only and any feature may be combined with another in accordance with the invention. While the principles of the invention have been made clear in the exemplary embodiments, it will be obvious to those skilled in the art that modifications of the structure, arrangement, proportions, elements, and materials may be utilized in the practice of the invention, and otherwise, which are particularly adapted to specific environments and operative requirements without departing from the principles of the invention. The appended claims are intended to cover and embrace any and all such modifications, with the limits only of the true purview, spirit and scope of the invention.

What is claimed is:

1. A system for treating skin, comprising:

a handheld device comprising a main body and a working end along a distal end of the main body;

an outer periphery extending along the distal end of the handheld device;

at least one surface element extending distally from the working end of the handheld device, said at least one surface element being positioned within an interior area circumscribed by the outer periphery;

wherein the at least one surface element comprises at least one sharp edge configured to abrade skin when said handheld device is moved relative to a skin surface; and at least one opening along the working end of the handheld device;

wherein the at least one opening is configured to be placed in fluid communication with a vacuum source via a passageway, said passageway being configured to convey debris away from the working end when said vacuum source is activated; and

wherein substantially an entire circumference of the outer periphery is configured to contact a skin surface during a treatment procedure.

2. The system of claim 1, further comprising at least one inflow port located along the working end, wherein said at least one inflow port is configured to deliver a flowable media to the skin during a treatment.

3. The system of claim 2, wherein at least a portion of the at least one surface element is positioned between the at least one inflow port and the at least one opening.

4. The system of claim 2, wherein the at least one inflow port is in fluid communication with a fluid media reservoir.

5. The system of claim 4, wherein the fluid media reservoir is configured to removably couple to the handheld device.

6. The system of claim 4, wherein the fluid media reservoir comprises a remote reservoir that is separate from the handheld device.

7. The system of claim 1, wherein the working end is removable from the main body.

8. The system of claim 1, wherein the working end comprises a transparent material.

9. The system of claim 1, wherein the working end comprises a plastic.

10. A system for treating a skin surface, comprising:

a handheld device comprising a body and a distal end, said distal end comprising at least one surface element configured to selectively abrade skin;



US 8,337,513 B2

**9**

at least one aspiration opening at or near the distal end of the handheld device, wherein said at least opening is in fluid communication with a suction passageway configured to apply a suction to the at least one aspiration opening; and

wherein the distal end comprises an outer periphery that generally circumscribes an interior area, the at least one surface element positioned within the interior area;

wherein substantially an entire circumference of the outer periphery is configured to contact a skin surface during a treatment procedure; and

wherein the at least one aspiration opening is positioned within the interior area.

**10**

**11.** The system of claim **10**, further comprising at least one delivery port located along the distal end, said at least one delivery port configured to be in fluid communication with at least one flowable media.

**12.** The system of claim **11**, wherein the at least one delivery port is in fluid communication with a fluid media reservoir.

**13.** The system of claim **12**, wherein the fluid media reservoir is removably coupled to the handheld device.

**14.** The system of claim **12**, wherein the fluid media reservoir comprises a remote reservoir that is separate from the handheld device.

\* \* \* \* \*